Page 1 of 1


IMAGE COMMUNICATION EQUIPMENT, AND IMAGE PROCESSING UNIT AND CONTROL METHOD THEREFOR

Publication number: JP9008983 (A)
Publication date: 1997-01-10
Inventor(s): MISHIMA KENICHI; SAKAUCHI TOMOMI; KIMURA TOSHIHIRO; MATSUI AKIRA; TADOKORO YOSHIHISA; YAMAZAKI TAKESHI +
Applicant(s): CANON KK +
Classification:
- international: ***G06F3/00; G06F3/048; G06F3/14; G06T1/00; H04N1/00;*** **G06F3/00; G06F3/048; G06F3/14; G06T1/00; H04N1/00;** (IPC1-7): G06F3/14; G06T1/00; H04N1/00
- European:
Application number: JP19950153330 19950620
Priority number(s): JP19950153330 19950620

Also published as:
JP3507199 (B2)

Abstract of **JP 9008983 (A)**

PURPOSE: To easily recognize an operating state of a function of the image processing unit or the image communication equipment when a window corresponding to the function is closed by converting automatically an image in a displayed icon into an image denoting the operating state in response to the operating state of the image communication equipment. CONSTITUTION: The equipment is provided with an icon display control means 8 displaying icons selected by the operator onto a display means 7 in order to execute a prescribed operation in the image communication equipment and an image conversion means 3 converting an image in the icon displayed on the display means 7 into an image denoting the operating state automatically depending on the operating state of the image communication equipment. Thus, even when a window is closed, the operating state is simply recognized.; Furthermore, when an icon corresponding to a desired function is selected, the operator easily recognizes other relating function started with the function.

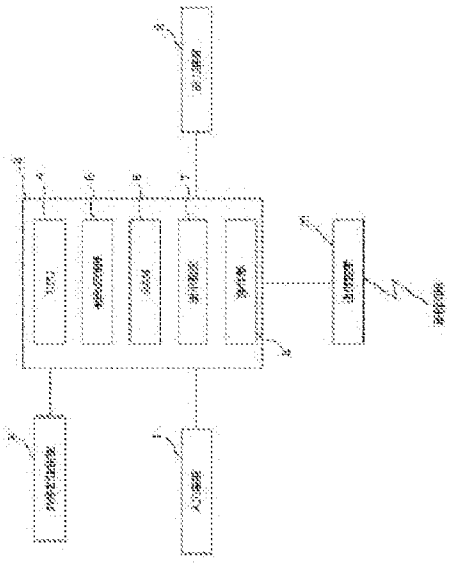

Data supplied from the ***espacenet*** database — Worldwide